


# Customer X - iriSelect settings

## MODE 0

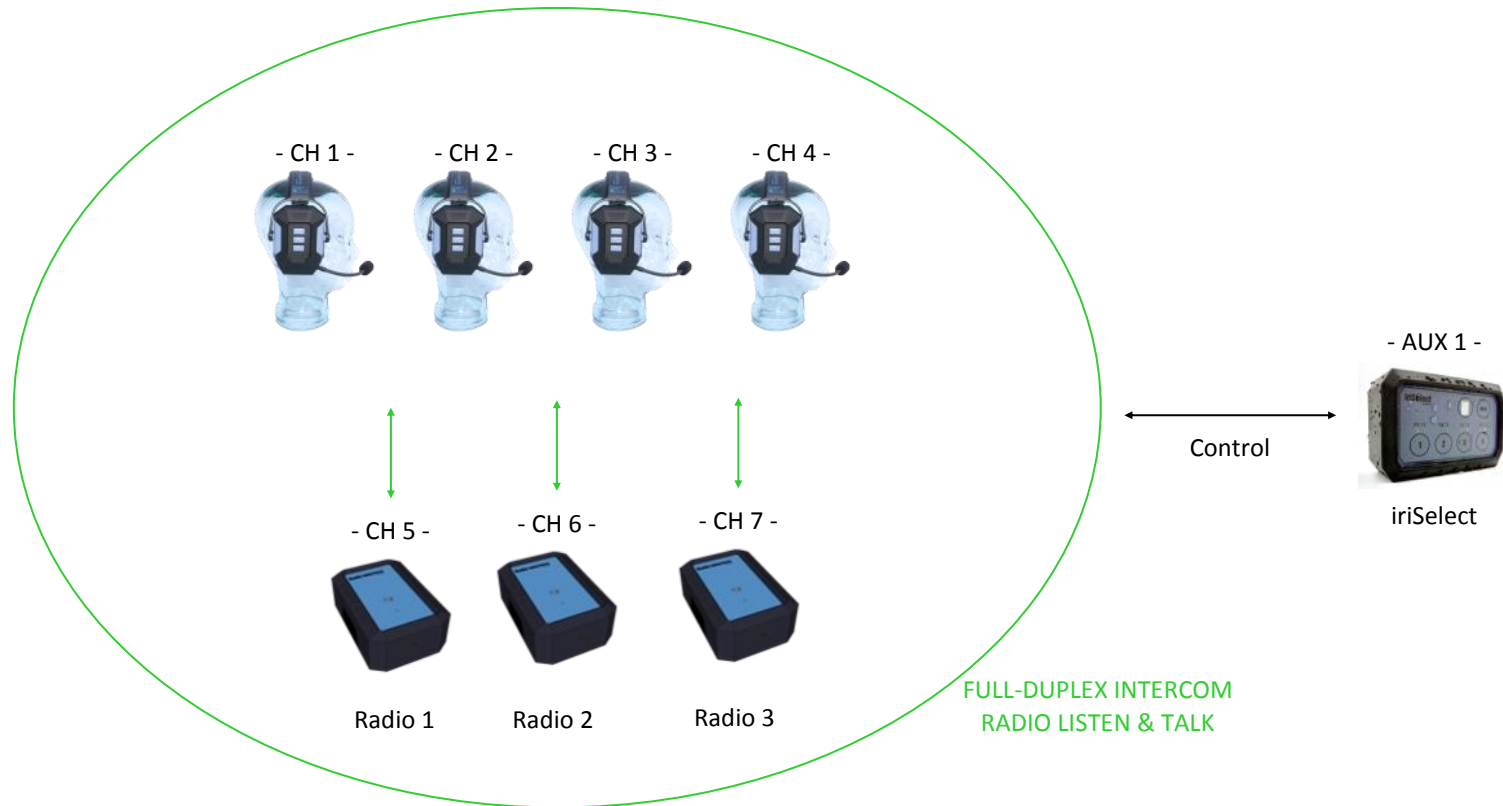


### MODE 0:

This is the default “wake-up” mode. All 4 headsets have full-duplex intercom, and all 4 headsets can hear incoming audio on both radios. When pushing a PTT, audio from all 4 headsets is transmitted on the corresponding radio.

Normal radio discipline is to be observed.

# Customer X - iriSelect settings

## MODE 1

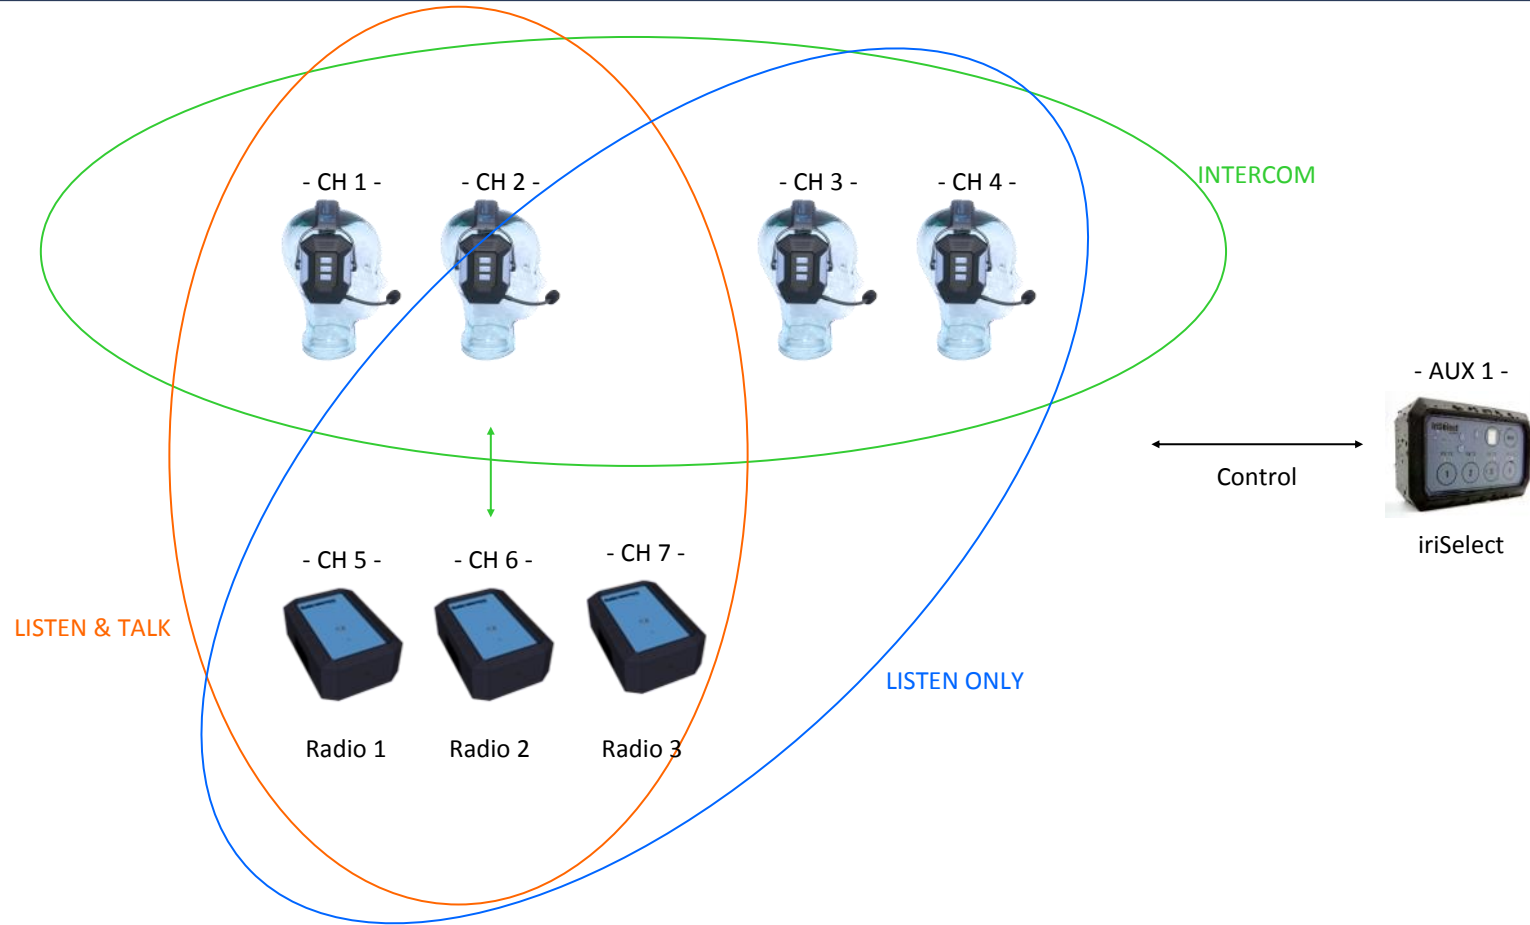


### MODE 1:

In this mode all 4 headsets have full-duplex intercom, and all 4 headsets can hear incoming audio on all radios. When pushing a PTT, only audio from headset 1 & 2 is transmitted on the corresponding radio (TX audio from headset 3 & 4 is muted). Normal radio discipline is to be observed between headset 1 & 2.

# Customer X - iriSelect settings

## MODE 2

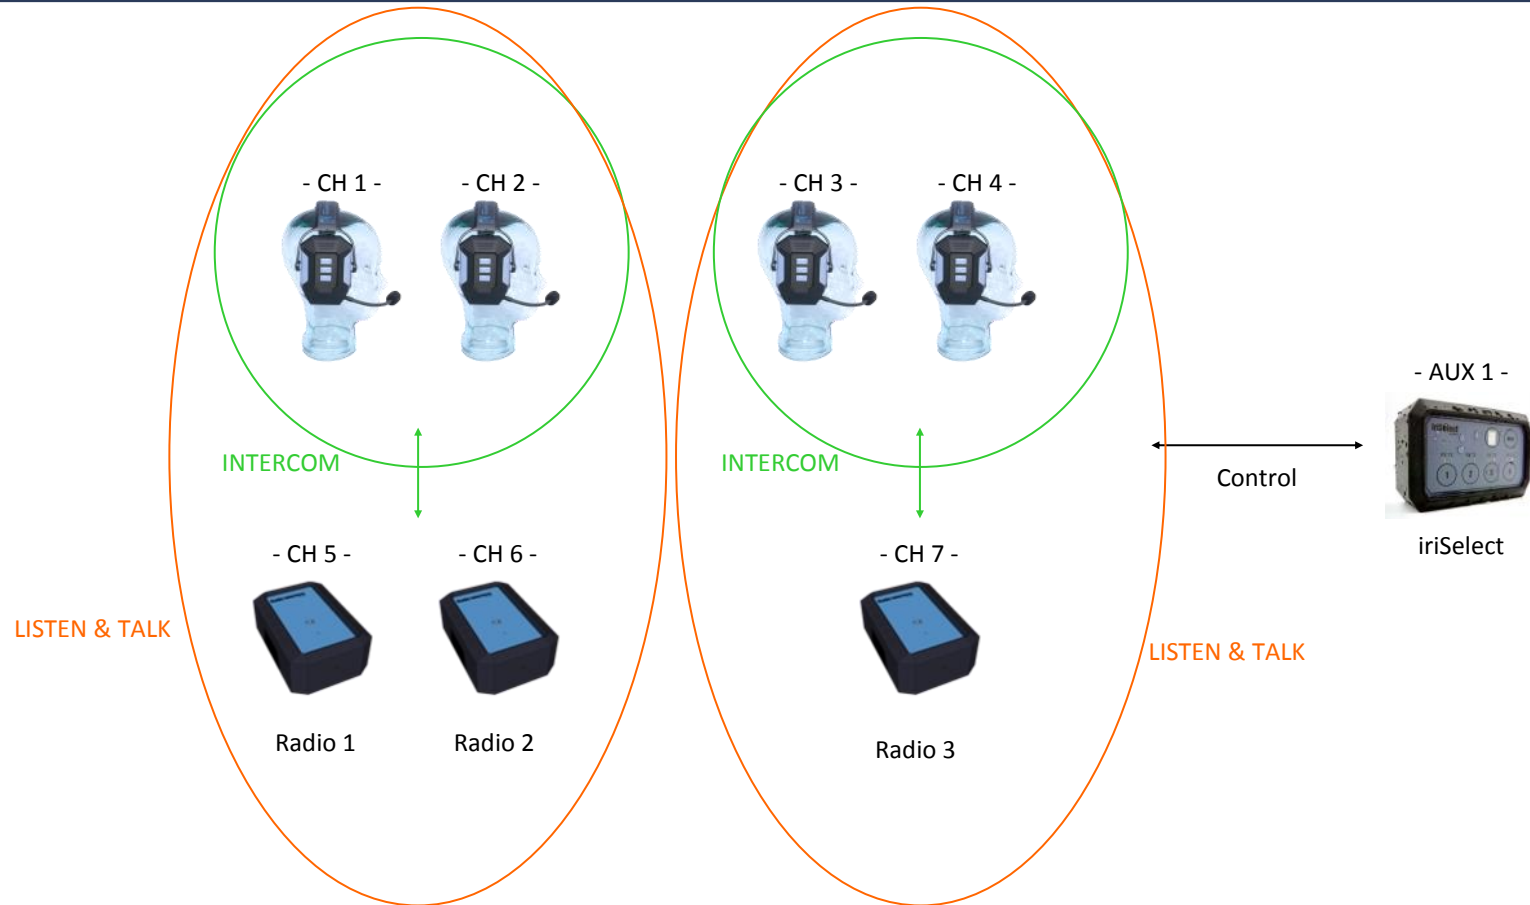

### MODE 2:

In this mode the system divides audio in two groups.

Headsets 1 & 2 have full-duplex intercom, and both can hear incoming audio on radios 1 & 2. When pushing PTT for radios 1 or 2 both can talk.

Headsets 3 & 4 have full-duplex intercom, and both can hear incoming audio on radio 3 only. When pushing PTT for radio 3 both can talk.

In this mode there is NO intercom between headsets 1+2 and 3+4.